


# ROLL-OR-KARI WEB LOCK AND TIGHTENER

## THREADING DIRECTIONS

Follow Closely Until Familiar  
With Threading


---

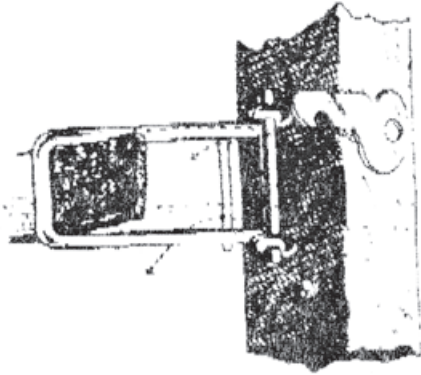

**Figure 1**

Hold Locking Device in Extreme  
Outward Position.


---

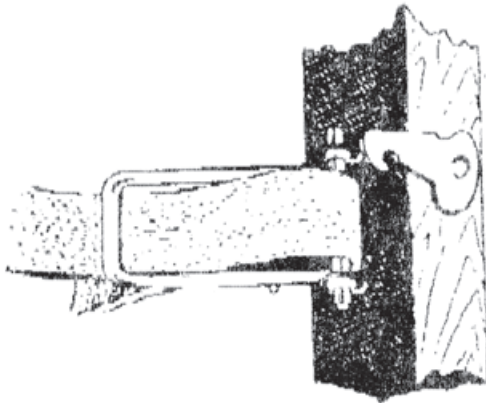

**Figure 2**

Strap is Threaded Through  
Large Opening Around Hinge  
Post. Pull End Through Until  
in Approximate Adjustment.

---

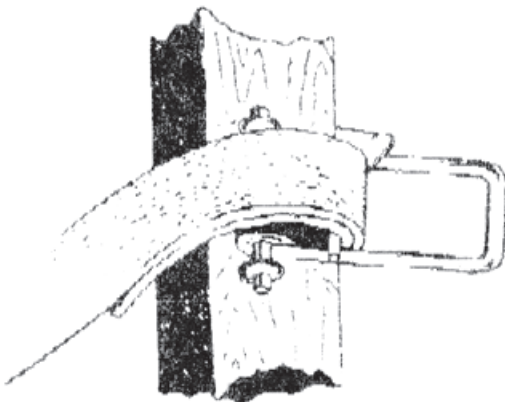

**Figure 3**

Swing Locking Device to  
Locking Position. Note: End  
of Strap is Inside of  
Tightened Strap if Correctly  
Threaded.

---

## CAUTION

Do Not Raise Load Until  
Straps Are Tightened.

FOR LONGER LIFE OF TRUCKS  
KEEP NUTS AND BOLTS TIGHTENED.